

Backlash-free Line Shafts Series

Torsionally stiff and flexible line shafts are used in applications involving high torque values and rotational motion combined with the highest possible angular precision or

considerable distances between shafts. The application range of line shafts covers almost all technical areas, where mechanical power transmission and stiffness are important:

- Pumps with axial and vertical drives
- Highly dynamic portal drives
- Gantry systems
- Linear modules
- Packaging machines

- Machine tools
- Special purpose machinery

Clamping hub variations in half shell construction are optionally available.

Torsionally flexible line shafts with elastomeric spider

- Absolutely backlash-free
- Installation length up to 6 m possible
- Compensation of axial, radial and angular misalignment
- Cost-effective, simple assembly
- Maintenance free
- Variable length of the intermediate (or line) tube of steel
- Double-sided standard hubs
- Backlash free elastomeric spider
- Excellent transmission of torque and seating of misalignment
- High transmission accuracy
- Temperature range -30° to 120° C / -22 F to 248 F

Torsion proofed line shafts with metal bellows

- Absolutely backlash-free
- Installation length up to 6 m possible
- Compensation of axial, radial and angular misalignment
- Aluminum lightweight construction up to size 200, optional with CFK-tube
- Maintenance free, no wear
- Universal joint tube version available
- Special stainless steel bellow
- Excellent power transmission
- High torsional stiffness and misalignment compensation
- Optimum moment of inertia
- Additional balancing holes for better cyclic running
- Temperature range -30° to 100° C / -22 F to 212 F.
- High precision of rotation angle



ADS-ZW
Servo-insert coupling with clamping style hubs
[Technical data Page 4](#)



ADS/B-ZW
Servo-insert coupling with clamping style hubs and tension ring hub
[Technical data Page 5](#)



ASS/A-ZW (special design)
Servo-insert coupling with clamping style hubs
[Technical data Page 6](#)



ASS/B-ZW
Servo-insert coupling with tension rings, outside mounting
[Technical data Page 7](#)



ADS/H-ZW (special design)
Servo-insert coupling with clamping style hubs in half shell construction
[Technical data Page 8](#)



AKN-ZW
Metal bellow coupling with clamping style hubs in flange construction
[Technical data Page 9](#)


The details in this catalogue describe the products and do not represent guaranteed qualities. The user is responsible for checking

and defining the technical characteristics of his particular application. We reserve the right to make alterations at any time. We

cannot be held responsible for any omissions or printing errors. Deliveries are based on individual detailed contractual agreements.

Backlash-free Servo-insert Coupling Series ADS-ZW

type Line Shaft

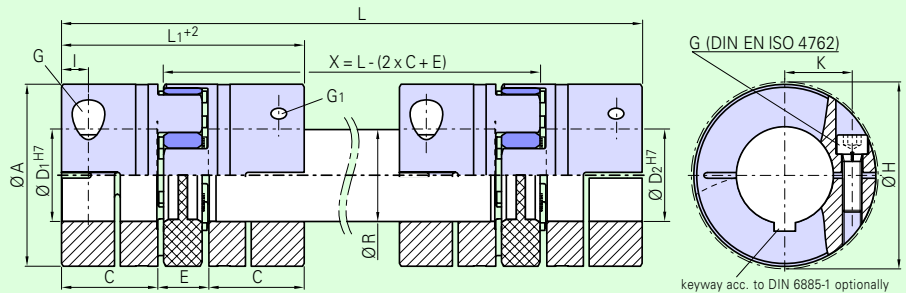

Technical Data Series ADS-ZW

Type			14	19	24	28	38	42	48
Nominal torque	(Nm)	T _{KN} (98ShA)	12,5	17	60	160	325	450	525
Tightening torque of screws	(Nm)	MA	5	10	18	43	84	84	145
Torsional stiffness (tube)	(Nm/rad)	C per m	70	130	950	1.800	5.200	11.800	17.500
Max. speed	(min ⁻¹)	n _{max}	1.500	1.500	1.500	1.500	1.500	1.500	1.500
Standard shore hardness			98 SH A (red)						
Misalignment			see page 10						

Dimensions (mm) Series ADS-ZW

Type		14	19	24	28	38	42	48
L	(max.)	3.000	3.000	3.000	3.000	3.000	3.000	3.000
L ₁		35	66	78	90	114	126	140
A		30	40	55	65	80	95	105
I		5	6	10	11	13	14	15
C		11	25	30	35	45	50	56
Ø D ₁ ^{H7} / Ø D ₂ ^{H7}	min. - max.	10-14	10-20	20-28	24-35	32-44	35-50	40-60
K		10,5	15	20	24	30	35	40
E		13	16	18	20	24	26	28
R (steel precision tube)		10 x 2,0	12 x 2,0	20 x 3,0	25 x 2,5	32 x 3,5	40 x 4,0	45 x 4,0
G/G ₁ (DIN 912)		M4	M5	M6	M8	M10	M10	M12
H (clearance diameter)		34	45	57	70	89	96	110
Hub material		Al	Al	Al	Al	Al	St	St

More length dimensions upon request! Please ask for technical advice if you require higher speeds, bigger fitting lengths or if you install the coupling in a vertical way. To facilitate the assembly we recommend to keep the distance dimension X of the shaft. A tube with a shift fit is also available. For more information see the catalogue Backlash-free Servo-insert Couplings.

Bore range D1/D2 and corresponding transmissible torque values (Nm) of the coupling

Type	Ø 10	Ø 11	Ø 13	Ø 14	Ø 16	Ø 18	Ø 19	Ø 20	Ø 24	Ø 25	Ø 28	Ø 30	Ø 32	Ø 35	Ø 38	Ø 40	Ø 42	Ø 44	Ø 48	Ø 50	Ø 60
14	12,5	12,5	12,5	12,5	12,5																
19	17	17	17	17	17	17	17	17													
24								60	60	60	60										
28									160	160	160	160									
38													325	325	325	325	325	325			
42														415	427	435	443	450	450	450	
48																525	525	525	525	525	525

Ordering data

ADS-ZW 14/80 - 4H7 - 10H7 - xxxxx

Type/total length

Bore size D₁


Bore size D₂

Additional details, e.g. different shore hardness, keyway

- Cost-efficient design
- Installation-friendly
- Electrically isolating, vibration damping
- Backlash-free
- Fail-safe design

Backlash-free Servo-insert Coupling Series ADS/B-ZW

type Line Shaft

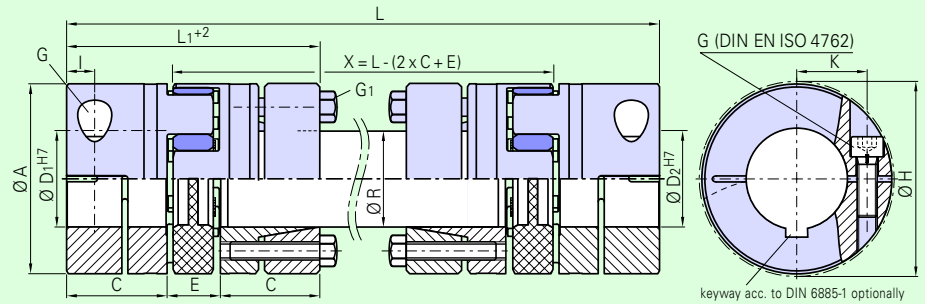

Technical Data Series ADS/B-ZW

Type			14	19	24	28	38	42	48
Nominal torque	(Nm)	TKN (98ShA)	12,5	17	60	160	325	450	525
Tightening torque of screws	(Nm)	MA G	5	10	18	43	84	84	145
		G1	1,8	3	6	6	10	35	69
Torsional stiffness (tube)	(Nm/rad)	C per m	70	130	950	1.800	5.200	11.800	17.500
Max. speed	(min ⁻¹)	n _{max}	1.500	1.500	1.500	1.500	1.500	1.500	1.500
Standard shore hardness	98 SH A (red)								
Misalignment	see page 10								

Dimensions (mm) Series ADS/B-ZW

Type		14	19	24	28	38	42	48
L	(max.)	3.000	3.000	3.000	3.000	3.000	3.000	3.000
L ₁		35	66	78	90	114	126	140
A		30	40	55	65	80	95	105
I		5	6	10	11	13	14	15
C		11	25	30	35	45	50	56
∅ D ₁ ^{H7} / ∅ D ₂ ^{H7}	min. - max.	10-14	10-20	20-28	24-35	32-44	35-50	40-60
K		10,5	15	20	24	30	35	40
E		13	16	18	20	24	26	28
R (steel precision tube)		10 x 2,0	12 x 2,0	20 x 3,0	25 x 2,5	32 x 3,5	40 x 4,0	45 x 4,0
G (DIN 912)		M4	M5	M6	M8	M10	M10	M12
G ₁ (DIN 931)		M3	M4	M5	M5	M6	M8	M10
H (clearance diameter)		34	45	57	70	89	96	110
Hub/tension ring material		Al/St	Al/St	Al/St	Al/St	Al/St	St/St	St/St

More length dimensions upon request! Please ask for technical advice if you require higher speeds, bigger fitting lengths or if you install the coupling in a vertical way. To facilitate the assembly we recommend to keep the distance dimension X of the shaft. A tube with a shift fit is also available. For more information see the catalogue Backlash-free Servo-insert Couplings.

Bore range D1/D2 and corresponding transmissible torque values (Nm) of the coupling

Type	∅ 10	∅ 11	∅ 13	∅ 14	∅ 16	∅ 18	∅ 19	∅ 20	∅ 24	∅ 25	∅ 28	∅ 30	∅ 32	∅ 35	∅ 38	∅ 40	∅ 42	∅ 44	∅ 48	∅ 50	∅ 60
14	12,5	12,5	12,5	12,5	12,5																
19	17	17	17	17	17	17	17	17													
24								60	60	60	60										
28									160	160	160	160	160	160							
38													325	325	325	325	325	325			
42														415	427	435	443	450	450	450	
48																525	525	525	525	525	525

Ordering data

ADS/B-ZW 14/80 - 4^{H7} - 10^{H7} - XXXXX

Type/total length

Bore size D₁


Bore size D₂

Additional details, e.g. different shore hardness, keyway

- Cost-efficient design
- Installation-friendly
- Electrically isolating, vibration damping
- Backlash-free, fail-safe design
- For higher torque transmission

Backlash-free Servo-insert Coupling Series ASS/A-ZW type Line Shaft

This picture shows a special design:
in combination with a safety coupling

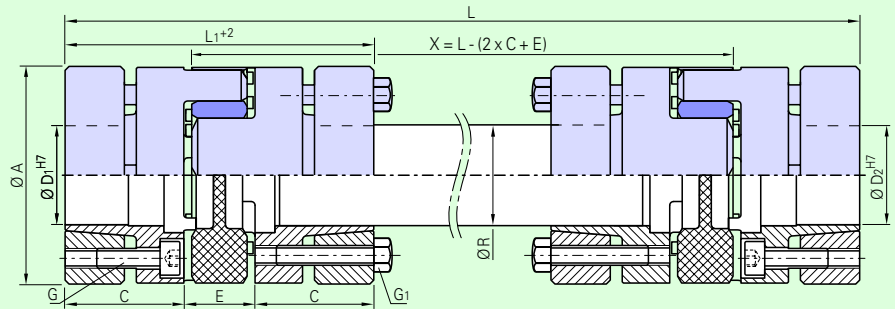

Technical Data Series ASS/A-ZW

Type			14	19	24	28	38	42	48
Nominal torque	(Nm)	T _{KN (98ShA)}	12,5	17	60	160	325	450	525
Tightening torque of screws	(Nm)	M _A G/G ₁	1,8	3	6	6	10	35	69
Torsional stiffness (tube)	(Nm/rad)	C per m	70	130	950	1.800	5.200	11.800	17.500
Max. speed	(min ⁻¹)	n _{max}	1.500	1.500	1.500	1.500	1.500	1.500	1.500
Standard shore hardness			98 SH A (red)						
Misalignment			see page 10						

Dimensions (mm) Series ASS/A-ZW

Type			14	19	24	28	38	42	48
L	(max.)		3.000	3.000	3.000	3.000	3.000	3.000	3.000
L ₁			50	66	78	90	114	126	140
A			32	40	55	65	80	95	105
C			18,5	25	30	35	45	50	56
Ø D ₁ H ₇ / Ø D ₂ H ₇	min. - max.		6-14	10-20	11-25	15-36	20-41	27-50	30-55
E			13	16	18	20	24	26	28
R (steel precision tube)			10 x 2,0	12 x 2,0	20 x 3,0	25 x 2,5	32 x 3,5	40 x 4,0	45 x 4,0
G (DIN 912)			M3	M4	M5	M5	M6	M8	M10
G ₁ (DIN 931)			M3	M4	M5	M5	M6	M8	M10
Hub material			Al	Al	Al	Al	Al	St	St

More length dimensions upon request! Please ask for technical advice if you require higher speeds, bigger fitting lengths or if you install the coupling in a vertical way. To facilitate the assembly we recommend to keep the distance dimension X of the shaft. A tube with a shift fit is also available. For more information see the catalogue [Backlash-free Servo-insert Couplings](#).

Bore range D1/D2 and corresponding transmissible torque values (Nm) of the coupling


Type	Ø6	Ø10	Ø11	Ø13	Ø14	Ø15	Ø17	Ø19	Ø20	Ø24	Ø25	Ø27	Ø30	Ø32	Ø36	Ø38	Ø41	Ø42	Ø44	Ø48	Ø50	Ø55
14	3,6	12,5	12,5	12,5	12,5																	
19		17	17	17	17	17	17	17	17													
24			22	37	46	56	60	60	60	60	60											
28						56	68	114	134	160	160	160	160	160	160							
38									134	230	261	325	325	325	325	325	325					
42												329	450	450	450	450	459	450	450	450	450	
48													450	525	525	525	525	525	525	525	525	525

Ordering data

ASS/A-ZW 14/80	-	4 ^{H7}	-	10 ^{H7}	-	XXXXXX
Type/total length						
Bore size D ₁						
Bore size D ₂						
Additional details, e.g. different shore hardness, keyway						

- For higher torque transmission
- Well suited for alternating loads
- Electrically isolating, vibration damping
- Backlash-free
- Fail-safe design

Backlash-free Servo-insert Coupling Series ASS/B-ZW type Line Shaft

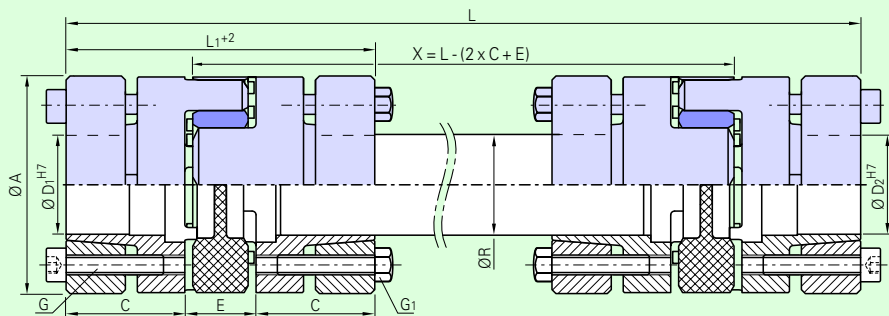

Technical Data Series ASS/B-ZW

Type			14	19	24	28	38	42	48
Nominal torque	(Nm)	T _{KN} (98ShA)	12,5	17	60	160	325	450	525
Tightening torque of screws	(Nm)	M _A G/G ₁	1,8	3	6	6	10	35	69
Torsional stiffness (tube)	(Nm/rad)	C per m	70	130	950	1.800	5.200	11.800	17.500
Max. speed	(min ⁻¹)	n _{max}	1.500	1.500	1.500	1.500	1.500	1.500	1.500
Standard shore hardness			98 SH A (red)						
Misalignment			see page 10						

Dimensions (mm) Series ASS/B-ZW

Type		14	19	24	28	38	42	48
L	(max.)	3.000	3.000	3.000	3.000	3.000	3.000	3.000
L ₁		50	66	78	90	114	126	140
A		32	40	55	65	80	95	105
C		18,5	25	30	35	45	50	56
Ø D ₁ ^{H7} / Ø D ₂ ^{H7}	min. - max.	6-14	10-20	11-25	15-36	20-41	27-50	30-55
E		13	16	18	20	24	26	28
R (steel precision tube)		10 x 2,0	12 x 2,0	20 x 3,0	25 x 2,5	32 x 3,5	40 x 4,0	45 x 4,0
G (DIN 912)		M3	M4	M5	M5	M6	M8	M10
G ₁ (DIN 931)		M3	M4	M5	M5	M6	M8	M10
Hub material		Al	Al	Al	Al	Al	St	St

More length dimensions upon request! Please ask for technical advice if you require higher speeds, bigger fitting lengths or if you install the coupling in a vertical way. To facilitate the assembly we recommend to keep the distance dimension X of the shaft. A tube with a shift fit is also available. For more information see the catalogue Backlash-free Servo-insert Couplings.

Bore range D1/D2 and corresponding transmissible torque values (Nm) of the coupling

Type	Ø6	Ø10	Ø11	Ø13	Ø14	Ø15	Ø17	Ø19	Ø20	Ø24	Ø25	Ø27	Ø30	Ø32	Ø36	Ø38	Ø41	Ø42	Ø44	Ø48	Ø50	Ø55
14	3,6	12,5	12,5	12,5	12,5																	
19		17	17	17	17	17	17	17	17													
24			22	37	46	56	60	60	60	60	60											
28						56	68	114	134	160	160	160	160	160								
38									134	230	261	325	325	325	325	325	325					
42												329	450	450	450	450	459	450	450	450	450	
48													450	525	525	525	525	525	525	525	525	525

Ordering data


ASS/B-ZW 14/80	-	4H7	-	10H7	-	XXXXX
Type/total length						
Bore size D ₁						
Bore size D ₂						
Additional details, e.g. different shore hardness, keyway						

- For higher torque transmission
- Well suited for alternating loads
- Electrically isolating, vibration damping
- Backlash-free
- Fail-safe design

Backlash-free Servo-insert Coupling Series ADS/H-ZW

type Line Shaft (half shell design)

This picture shows a special design of the ADS/H-ZW: one side with metal bellow and the other side with an elastomeric spider

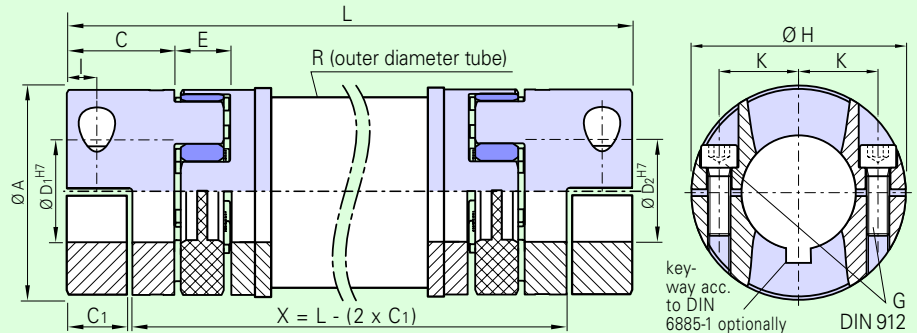

Technical Data Series ADS/H-ZW

Type			14	19	24	28	38	42	48
Nominal torque	(Nm)	T _{KN}	12,5	17	60	160	325	450	525
Tightening torque of screws	(Nm)	G	5	10	18	43	84	84	145
Torsional stiffness (tube)	(Nm/rad)	C per m	700	1.610	7.120	12.700	22.350	73.000	251.000
Max. speed	(min ⁻¹)	n _{max}	1.500	1.500	1.500	1.500	1.500	1.500	1.500
Misalignment			see page 10						

Dimensions (mm) Series ADS/H-ZW

Type			14	19	24	28	38	42	48
L	(max.)		3.000	3.000	3.000	3.000	3.000	3.000	3.000
C			11	25	30	35	45	50	56
C ₁			9	14	21	24	25	27	30
A			30	40	55	65	80	95	105
I			5	6	10	11	13	14	15
Ø D ₁ ^{H7} / Ø D ₂ ^{H7}	min. - max.		10-14	10-20	20-28	24-35	32-44	35-50	40-60
K			10,5	15	20	24	30	35	40
E			13	16	18	20	24	26	28
R (precision tube)			28	35	50	60	76	90	100
G/G ₁ (2 x DIN 912)			M4	M5	M6	M8	M10	M10	M12
H (clearance diameter)			34	45	57	70	89	96	110
Tube/hub material			Al	Al	Al	Al	Al	St	St

More length dimensions upon request! Please ask for technical advice if you require higher speeds, bigger fitting lengths or if you install the coupling in a vertical way. To facilitate the assembly we recommend to keep the distance dimension X of the shaft. For more information see the catalogue Backlash-free Servo-insert Couplings. Metal bellow version available optionally.

Bore range D1/D2 and corresponding transmissible torque values (Nm) of the coupling

Type	Ø 10	Ø 11	Ø 13	Ø 14	Ø 16	Ø 18	Ø 19	Ø 20	Ø 24	Ø 25	Ø 28	Ø 30	Ø 32	Ø 35	Ø 38	Ø 40	Ø 42	Ø 44	Ø 48	Ø 50	Ø 60
14	12,5	12,5	12,5	12,5	12,5																
19	17	17	17	17	17	17	17	17													
24								60	60	60	60										
28									160	160	160	160									
38													325	325	325	325	325	325			
42														415	427	435	443	450	450	450	
48																525	525	525	525	525	525

Ordering data

ADS/H-ZW 14/80 - 4H7 - 10H7 - xxxxx

Type/total length

Bore size D₁


Bore size D₂

Additional details, e.g. stainless steel keyway, CFK-tube

- Cost-efficient design
- Installation-friendly
- Electrically isolating, vibration damping
- Backlash-free, fail-safe design
- For higher torque transmission

Backlash-free Metal Bellow Coupling Series AKN-ZW

type Line Shaft (flange design)

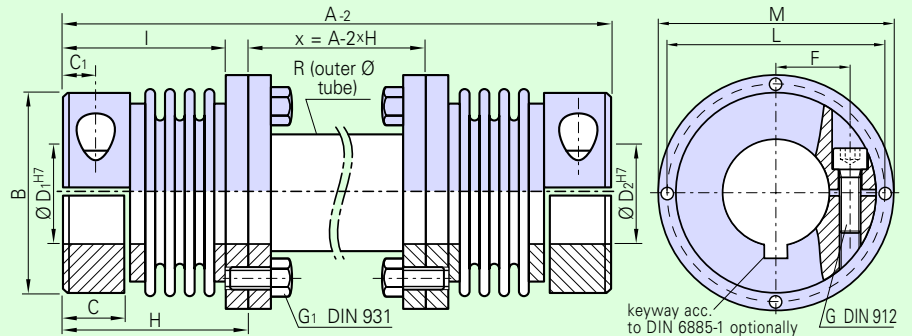

Technical Data Series AKN-ZW

Type		18	30	60	150	200	300	500
Nominal torque (Nm)	T _{KN}	18	30	60	150	200	300	500
Tightening torque of screws (Nm)	G	6	15	30	70	80	90	145
Tightening torque of flange screws (Nm)	G ₁	3	4	7	10	12	30	30
Torsional stiffness (tube) (Nm/rad)	C per m	1.610	7.120	12.700	22.350	72.000	251.000	337.000
Max. speed (min ⁻¹)	n _{max}	1.500	1.500	1.500	1.500	1.500	1.500	1.500
Misalignment		see page 10						

Dimensions (mm) Series AKN-ZW

Type		18	30	60	150	200	300	500
A	(max.)	3.000	3.000	3.000	3.000	3.000	3.000	3.000
H		44,5	57,5	71	78	86	94	110
B		45	56	66	80	90	96	110
l		39	51	61	69	76	81	96
C		12	15	19,5	21,5	25,5	26	29,5
Ø D ₁ ^{H7} / Ø D ₂ ^{H7}	min. - max.	10-25	20-25	23-35	28-35	32-42	40-45	40-60
R (outer diameter tube)		35	50	60	75	90	100	110
G (DIN 912)		M5	M6	M8	M10	M12	M12	M12
C ₁		5	7,5	9,5	11	12,5	13	17
G ₁ (DIN 931)		4 x M4	6 x M4	6 x M5	8 x M6	8 x M6	8 x M8	8 x M8
L		45	62	72	88	100	120	132
F		17,5	20	24	27	31	35	40
M		52	70	80	98	110	135	148
Tube/hub material		Al/Al	Al/Al	Al/Al	Al/St	Al/St	St/St	St/St

More length dimensions upon request! Please ask for technical advice if you require higher speeds, bigger fitting lengths or if you install the coupling in a vertical way. To facilitate the assembly we recommend to keep the distance dimension X of the shaft. For more information see the catalogue Backlash-free Metal Bellow Couplings.

For higher torque transmission of this coupling a conical hub design is available as an alternative to the clamping hub design.


Ordering data

AKN-ZW 18/500	-	10^{H7}	-	25^{H7}	-	xxxxx
Type/total length						
Bore size D ₁						
Bore size D ₂						
Additional details, e.g. stainless steel keyway, CFK-tube						

- Absolutely backlash free
- Installation length up to 6 m
- Simplest assembly
- Universal joint tube CFK (optional)

GERWAH Line Shafts Assembly Instructions

Types of misalignment

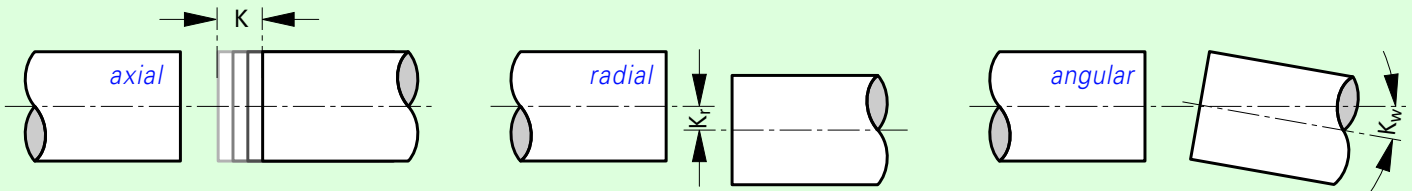

Alignment of the shafts:

The picture above shows the types of misalignment. It's necessary to adjust the shafts before assembly. The more accurate the initial alignment, the better the shaft can absorb additional misalignment during operation, thereby assuring optimum lifetime and quiet running conditions. If all (3) types of misalignment occur simultaneously, each type must not reach the maximum allowable value and they have to be aligned. GERWAH can assist you with the correct adjustment of the combined misalignment.

Installation:

Clean and degrease the hubs of the line shafts and re-check the tolerances.

The maximal diametrical clearance between hub and shaft must not exceed 0,03 mm

(not valid at shift fits).

According to the principle of construction slide a coupling hub onto each shaft and proceed to torque the tightening screws after

checking axial dimensions. Refer to the technical data to assure correct screw tightening torque.

The dimension of the shaft distance X should be kept.

Removal:

Remove the locking screws of the hubs. If necessary, the push-off threads can be used to remove the backlash-free line shaft connections. In case the hub connection doesn't come off autonomously, the connection can be removed by lightly applying a rubber hammer.

Please ask for detailed assembly instructions or find information on www.gerwah.com!

Misalignments

Size	Misalignments		
	mm radial* ΔK_r	mm axial ΔK_a	scale angular ΔK_w
14	5 mm per m	± 1 mm	1,5°
19	5 mm per m	± 1 mm	1,5°
24	5 mm per m	± 1 mm	1,5°
28	5 mm per m	± 1 mm	1,5°
38	5 mm per m	± 1 mm	1,5°
42	5 mm per m	± 1 mm	1,5°
48	5 mm per m	± 1 mm	1,5°

* Radial/parallel misalignment depends on the length of the tube.