6-point gripper
for O-ring assembly



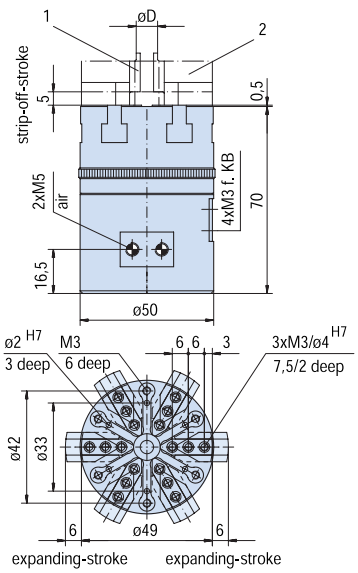

Advantages, benefits, comparisons and tips!
Stacks of information all about this product are on page 171.

Order no.:
GS65
Drive:
pneum.
Opening stroke (adjustable for each jaw) [mm]:
3-6
Stripping stroke [mm]:
5
Gripping force in opening [N]:
300
Self-locking via:
DSV1/8
Closing time/opening time [s]:
0,05
Repeatability ± [mm]:
0,1
Min./max. operating pressure [bar]:
4/8
Air volume per cycle [cm³]:
7
Min./max. operating temperature [°C]:
5/80
Temp. resistant version up to 150° C [add to part number]:
T1
Piston diameter [mm]:
25
Weight [kg]:
0,55

All data measured at 6 bar.

Ejector Jaws
Order no.: UB65-3



Ejector jaws
(screws are included in the scope of delivery)
order-no. UB 65-3

Blank Jaws
Order no.: UB65-2



Non machined jaws
for O-ring seal ø20-60 mm

Opening/Expanding Jaws
Order no.: UB65-1 (Aluminum)
Order no.: UB65-4 (Steel)



Jaws
for O-ring seal ø4-20 mm