


F 2260 Ø60 mm, Graphite Brushes, 40 Watt

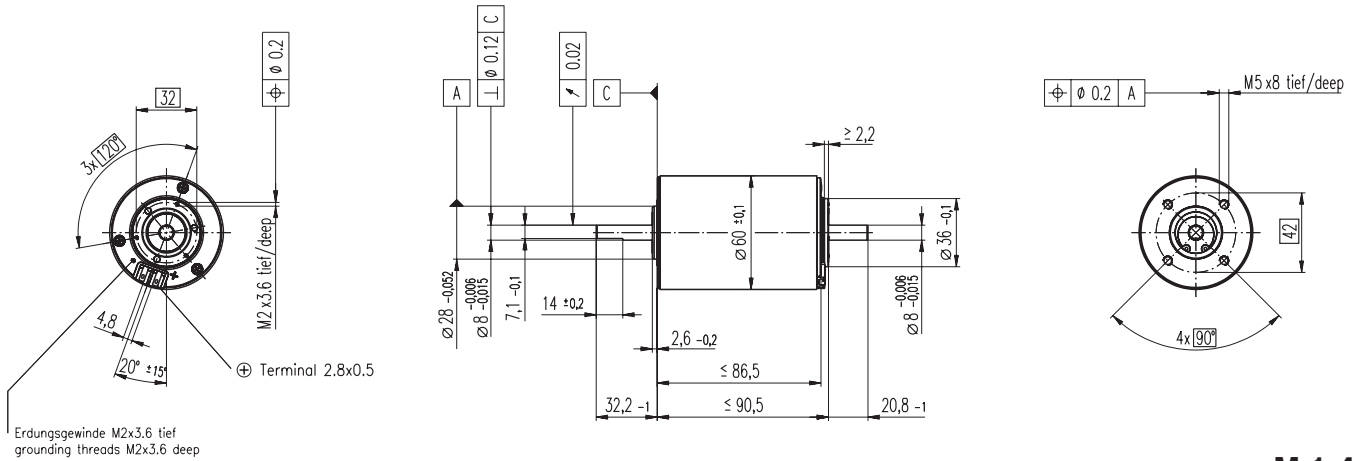

M 1:4

- Stock program
- Standard program
- Special program (on request!)

Order Number


2260. ... -51.216-200 (Insert winding number)

Winding number		811	812	813	814	815	816	817	818	810	819	820						
Motor Data																		
1	Assigned power rating	W	40	40	40	40	40	40	40	40	40	40						
2	Nominal voltage	Volt	18.0	18.0	24.0	30.0	36.0	36.0	48.0	48.0	48.0	48.0						
3	No load speed	rpm	4500	3450	3660	4270	4580	3630	2950	3190	2590	2090	1630					
4	Stall torque	Nm	0.870	0.707	0.758	0.868	0.916	0.733	0.591	0.633	0.514	0.407	0.312					
5	Speed / torque gradient	rpm / mNm	5.41	5.11	5.01	5.07	5.14	5.10	5.17	5.19	5.21	5.34	5.48					
6	No load current	mA	387	283	225	215	194	147	117	95	75	60	46					
7	Starting current	A	23.8	14.8	12.6	13.4	12.6	7.97	5.24	4.53	3.00	1.93	1.16					
8	Terminal resistance	Ohm	0.755	1.21	1.91	2.25	2.87	4.52	6.87	10.6	16.0	24.9	41.2					
9	Max. permissible speed	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000					
10	Max. continuous current	A	3.30	2.67	2.16	1.99	1.77	1.43	1.17	0.945	0.771	0.621	0.484					
11	Max. continuous torque	mNm	120	127	130	130	129	132	132	132	132	131	130					
12	Max. power output at nominal voltage	W	98.2	61.2	70.4	94.4	107	67.8	44.4	51.6	33.9	21.5	12.8					
13	Max. efficiency	%	73	72	73	75	75	74	71	73	70	67	64					
14	Torque constant	mNm / A	36.5	47.6	60.3	65.0	73.0	92.0	113	140	171	211	268					
15	Speed constant	rpm / V	262	201	158	147	131	104	84.8	68.4	55.7	45.3	35.6					
16	Mechanical time constant	ms	36	36	35	35	34	34	34	34	34	34	34					
17	Rotor inertia	gcm ²	638	666	665	651	638	641	630	623	620	604	589					
18	Terminal inductance	mH	0.23	0.39	0.63	0.73	0.92	1.46	2.18	3.36	5.05	7.66	12.40					
19	Thermal resistance housing-ambient	K / W	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0					
20	Thermal resistance rotor-housing	K / W	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4					
21	Thermal time constant winding	s	73	76	76	74	73	73	72	71	71	69	67					

Specifications

- Axial play at axial load < 15 N ≤ 0.1 mm
- Axial play at axial load > 15 N 0.1 - 0.5 mm
- Axial play for motor combinations with encoder is limited to max. 0.15 mm
- Preloaded **ball bearing** preload strength min. 15 N
- Max. **ball bearing** loads axial (dynamic) 15 N
- radial (5 mm from flange) 100 N
- Force for press fits (static) 400 N
- (static, shaft supported) 10 000 N
- Radial play **ball bearing** 0.05 mm
- Ambient temperature range -20 ... +100°C
- Max. rotor temperature +125°C
- Number of commutator segments 26
- Weight of motor 790 g
- 2 pole permanent magnet
- Values listed in the table are nominal. For applicable tolerances see page 43. For additional details please use the maxon selection program on the enclosed CD-Rom.

Operating Range

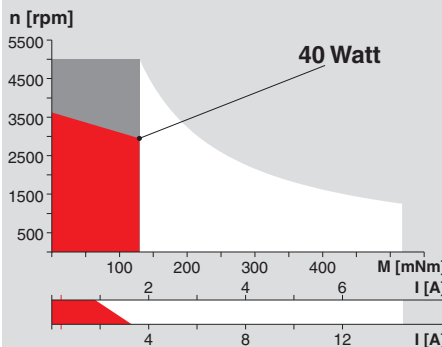


Comments

- Recommended operating range**
 - Continuous operation**
In observation of above listed thermal resistances (lines 19 and 20) the maximum permissible rotor temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
 - Short term operation**
The motor may be briefly overloaded (recurring).
- 818 Motor with high resistance winding
811 Motor with low resistance winding

Details on page 49

maxon Modular System

Planetary Gearhead
 Ø62 mm
 8 - 50 Nm
 Details page 223



Recommended Electronics:
 ADS 50/5 page 253
 ADS_E 50/5 254
 EPOS 24/5 263
 MIP 10 265
 MIP 50 265
Notes 17

Overview on page 17 - 21

- Digital Encoder**
HP HEDS 5540
 500 CPT, 3 channels
 Details page 237
- Digital Encoder**
HP HEDL 5540
 500 CPT, 3 channels
 Details page 239
- Digital Encoder**
HP HEDS 6540
 1000 CPT, 3 channels
 Details page 242
- Brake**
 Ø40 mm
 24 VDC, 0.4 Nm
 Details page 269

