


RE 13 \varnothing 13 mm, Precious Metal Brushes, 0.75 Watt, CE approved

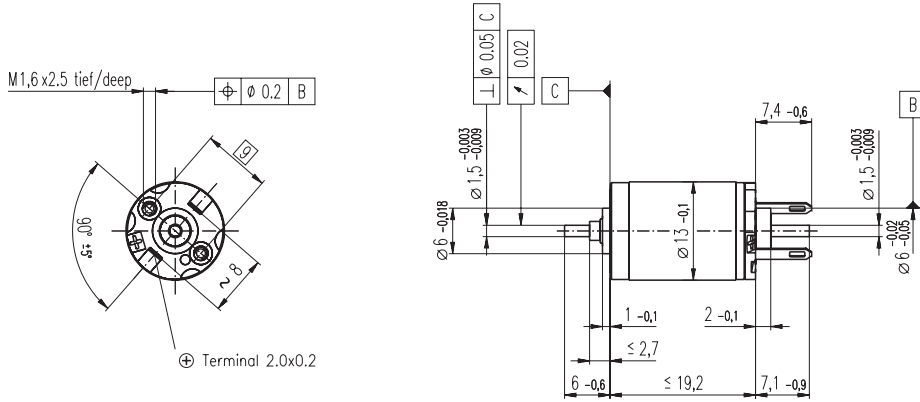

M 1:1

- Stock program
- Standard program
- Special program (on request!)


Order Number

Motor Data		Order Number															
		118431	118432	118433	118434	118435	118436	118437	118438	118439	118440	118441	118442	118443	118444	118445	
1	Assigned power rating	W	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	
2	Nominal voltage	Volt	0.6	0.7	0.9	1.2	1.5	1.8	1.8	2.4	3.0	3.6	4.8	6.0	6.0	7.2	10.0
3	No load speed	rpm	6850	6670	6570	7230	6980	6840	5950	6490	6690	6480	6950	7000	6530	6650	7030
4	Stall torque	mNm	1.71	1.44	1.51	1.63	1.59	1.66	1.54	1.66	1.66	1.61	1.70	1.68	1.54	1.59	1.65
5	Speed / torque gradient	rpm / mNm	4170	4880	4560	4640	4600	4310	4040	4090	4220	4190	4250	4350	4440	4380	4450
6	No load current	mA	88	72	56	47	36	29	25	21	17	14	11	9	8	7	5
7	Starting current	mA	2140	1470	1210	1080	812	690	557	489	404	318	269	214	184	161	127
8	Terminal resistance	Ohm	0.281	0.491	0.742	1.11	1.85	2.61	3.23	4.90	7.42	11.3	17.8	28.0	32.6	44.9	78.8
9	Max. permissible speed	rpm	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600
10	Max. continuous current	mA	720	720	720	720	662	557	501	406	33	267	213	170	158	134	101
11	Max. continuous torque	mNm	0.492	0.615	0.801	0.987	1.22	1.26	1.30	1.29	1.27	1.27	1.26	1.25	1.24	1.24	1.24
12	Max. power output at nominal voltage	mW	298	242	251	299	281	288	232	272	281	265	300	298	254	267	294
13	Max. efficiency	%	64	61	62	63	63	63	63	64	64	63	64	64	62	63	63
14	Torque constant	mNm / A	0.802	0.980	1.25	1.51	1.96	2.41	2.76	3.39	4.10	5.08	6.33	7.84	8.37	9.89	13.0
15	Speed constant	rpm / V	11900	9740	7660	6310	4870	3970	3460	2820	2330	1880	1510	1220	1140	966	734
16	Mechanical time constant	ms	15	14	14	13	13	13	13	13	13	13	13	13	13	13	13
17	Rotor inertia	gcm ²	0.343	0.278	0.286	0.276	0.274	0.287	0.302	0.298	0.289	0.290	0.286	0.280	0.276	0.279	0.275
18	Terminal inductance	mH	0.01	0.01	0.01	0.02	0.04	0.05	0.07	0.11	0.16	0.24	0.38	0.58	0.66	0.92	1.60
19	Thermal resistance housing-ambient	K / W	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46
20	Thermal resistance rotor-housing	K / W	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
21	Thermal time constant winding	s	6	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Specifications

- Axial play 0.05 - 0.15 mm
- Max. **sleeve bearing** loads
 - axial (dynamic) 0.8 N
 - radial (5 mm from flange) 1.4 N
 - Force for press fits (static) 15 N
 - (static, shaft supported) 170 N
- Radial play **sleeve bearing** 0.014 mm
- Ambient temperature range -20 ... +65°C
- Max. rotor temperature +85°C
- Number of commutator segments 7
- Weight of motor 12 g
- 2 pole permanent magnet
- Values listed in the table are nominal. For applicable tolerances see page 43. For additional details please use the maxon selection program on the enclosed CD-Rom.

Operating Range

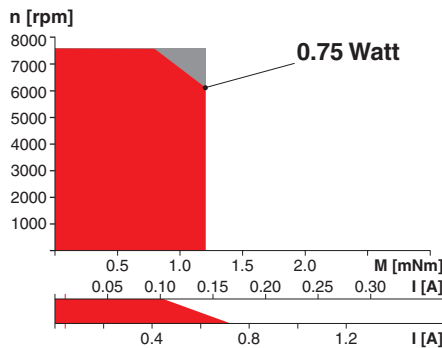

Comments

- **Recommended operating range**
- Continuous operation**
In observation of above listed thermal resistances (lines 19 and 20) the maximum permissible rotor temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
- Short term operation**
The motor may be briefly overloaded (recurring).
- 118445 Motor with high resistance winding
- 118431 Motor with low resistance winding

Details on page 49


maxon Modular System

Overview on page 17 - 21

Recommended Electronics:
 LSC 30/2 page 251
 EPOS 24/1 263
 MIP 10 265
Notes 17

- **Digital MR Encoder**
16 CPT,
2 channels
Details page 226
- **Digital MR Encoder**
64 / 128 / 256 CPT,
2 channels
Details page 227 / 228
- **Digital Magnetic Encoder** \varnothing 13 mm
16 CPT, 2 channels
Details page 245

RE 13 $\varnothing 13$ mm, Precious Metal Brushes, 0.75 Watt, CE approved

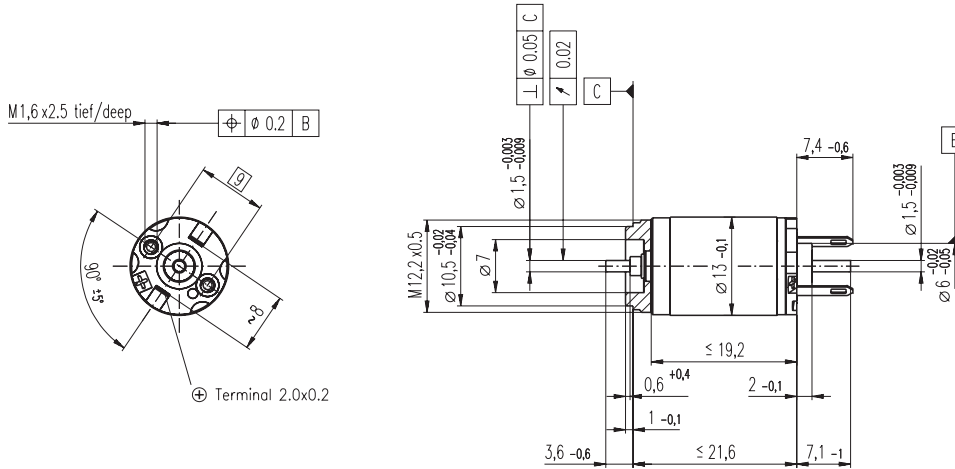

M 1:1

- Stock program
- Standard program
- Special program (on request!)


Order Number

Motor Data		118446	118447	118448	118449	118450	118451	118452	118453	118454	118455	118456	118457	118458	118459	118460
1 Assigned power rating	W	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
2 Nominal voltage	Volt	0.6	0.7	0.9	1.2	1.5	1.8	1.8	2.4	3.0	3.6	4.8	6.0	6.0	7.2	10.0
3 No load speed	rpm	6850	6670	6570	7230	6980	6840	5950	6490	6690	6480	6950	7000	6530	6650	7030
4 Stall torque	mNm	1.71	1.44	1.51	1.63	1.59	1.66	1.54	1.66	1.66	1.61	1.70	1.68	1.54	1.59	1.65
5 Speed / torque gradient	rpm / mNm	4170	4880	4560	4640	4600	4310	4040	4090	4220	4190	4250	4350	4440	4380	4450
6 No load current	mA	88	72	56	47	36	29	25	21	17	14	11	9	8	7	5
7 Starting current	mA	2140	1470	1210	1080	812	690	557	489	404	318	269	214	184	161	127
8 Terminal resistance	Ohm	0.281	0.491	0.742	1.11	1.85	2.61	3.23	4.90	7.42	11.3	17.8	28.0	32.6	44.9	78.8
9 Max. permissible speed	rpm	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600	7600
10 Max. continuous current	mA	720	720	720	720	662	557	501	406	33	267	213	170	158	134	101
11 Max. continuous torque	mNm	0.492	0.615	0.801	0.987	1.22	1.26	1.30	1.29	1.27	1.27	1.26	1.25	1.24	1.24	1.24
12 Max. power output at nominal voltage	mW	298	242	251	299	281	288	232	272	281	265	300	298	254	267	294
13 Max. efficiency	%	64	61	62	63	63	63	63	64	64	63	64	64	62	63	63
14 Torque constant	mNm / A	0.802	0.980	1.25	1.51	1.96	2.41	2.76	3.39	4.10	5.08	6.33	7.84	8.37	9.89	13.0
15 Speed constant	rpm / V	11900	9740	7660	6310	4870	3970	3460	2820	2330	1880	1510	1220	1140	966	734
16 Mechanical time constant	ms	15	14	14	13	13	13	13	13	13	13	13	13	13	13	13
17 Rotor inertia	gcm ²	0.343	0.278	0.286	0.276	0.274	0.287	0.302	0.298	0.289	0.290	0.286	0.280	0.276	0.279	0.275
18 Terminal inductance	mH	0.01	0.01	0.01	0.02	0.04	0.05	0.07	0.11	0.16	0.24	0.38	0.58	0.66	0.92	1.60
19 Thermal resistance housing-ambient	K / W	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46
20 Thermal resistance rotor-housing	K / W	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
21 Thermal time constant winding	s	6	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Specifications

- Axial play 0.05 - 0.15 mm
- Max. **sleeve bearing** loads
 - axial (dynamic) 0.8 N
 - radial (5 mm from flange) 1.4 N
 - Force for press fits (static) 15 N
 - (static, shaft supported) 170 N
- Radial play **sleeve bearing** 0.014 mm
- Ambient temperature range -20 ... +65°C
- Max. rotor temperature +85°C
- Number of commutator segments 7
- Weight of motor 15 g
- 2 pole permanent magnet
- Values listed in the table are nominal. For applicable tolerances see page 43. For additional details please use the maxon selection program on the enclosed CD-Rom.

Operating Range

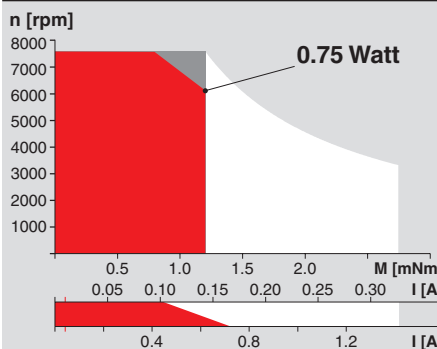

Comments

- Recommended operating range**
 - Continuous operation**
In observation of above listed thermal resistances (lines 19 and 20) the maximum permissible rotor temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
 - Short term operation**
The motor may be briefly overloaded (recurring).
- 118460 Motor with high resistance winding
118446 Motor with low resistance winding

Details on page 49


maxon Modular System

Planetary Gearhead

$\varnothing 13$ mm
0.2 - 0.35 Nm
Details page 194

Planetary Gearhead

$\varnothing 13$ mm
0.05 - 0.15 Nm
Details page 195

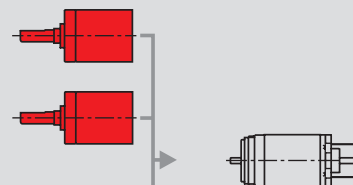

Digital MR Encoder

16 CPT,
2 channels
Details page 226

Digital MR Encoder

64 / 128 / 256 CPT,
2 channels
Details page 227 / 228

Digital Magnetic Encoder



$\varnothing 13$ mm
16 CPT, 2 channels
Details page 245

Recommended Electronics:

LSC 30/2 page 251
EPOS 24/1 263
MR 10 265

Overview on page 17 - 21

RE 13 \varnothing 13 mm, Precious Metal Brushes, 1.2 Watt, CE approved

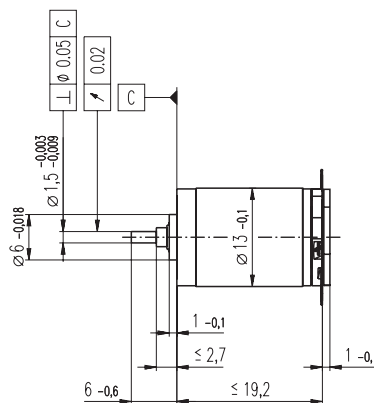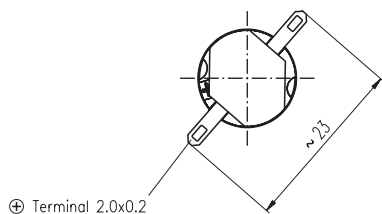

M 1:1

- Stock program
- Standard program
- Special program (on request!)


Order Number

Motor Data		118401	118402	118403	118404	118405	118406	118407	118408	118409	118410	118411	118412	118413	118414	118415
1 Assigned power rating	W	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
2 Nominal voltage	Volt	1.0	1.2	1.5	1.8	2.4	3.0	3.6	4.2	5.0	6.0	8.0	9.0	10.0	12.0	15.0
3 No load speed	rpm	11600	11300	11100	11000	11300	11600	12100	11500	11300	10900	11700	10600	11000	11200	10700
4 Stall torque	mNm	2.86	2.40	2.52	2.45	2.54	2.77	3.08	2.90	2.76	2.69	2.84	2.52	2.57	2.65	2.48
5 Speed / torque gradient	rpm / mNm	4170	4880	4560	4640	4600	4310	4040	4090	4220	4190	4250	4350	4440	4380	4450
6 No load current	mA	104	84	66	54	42	35	31	25	20	16	13	10	10	8	6
7 Starting current	mA	3560	2450	2020	1620	1300	1150	1110	857	674	530	449	321	307	268	190
8 Terminal resistance	Ohm	0.281	0.491	0.742	1.11	1.85	2.61	3.23	4.90	7.42	11.3	17.8	28.0	32.6	44.9	78.8
9 Max. permissible speed	rpm	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700
10 Max. continuous current	mA	720	720	720	720	662	557	501	406	330	267	213	170	158	134	101
11 Max. continuous torque	mNm	0.492	0.615	0.801	0.987	1.22	1.26	1.30	1.29	1.27	1.27	1.26	1.25	1.24	1.24	1.24
12 Max. power output at nominal voltage	mW	849	693	718	688	738	820	959	858	802	756	855	685	727	762	676
13 Max. efficiency	%	69	67	68	67	68	69	70	70	69	69	69	68	68	68	68
14 Torque constant	mNm / A	0.802	0.980	1.25	1.51	1.96	2.41	2.76	3.39	4.10	5.08	6.33	7.84	8.37	9.89	13.0
15 Speed constant	rpm / V	11900	9740	7660	6310	4870	3970	3460	2820	2330	1880	1510	1220	1140	966	734
16 Mechanical time constant	ms	15	14	14	13	13	13	13	13	13	13	13	13	13	13	13
17 Rotor inertia	gcm ²	0.343	0.278	0.286	0.276	0.274	0.287	0.302	0.298	0.289	0.290	0.286	0.280	0.276	0.279	0.275
18 Terminal inductance	mH	0.01	0.01	0.01	0.02	0.04	0.05	0.07	0.11	0.16	0.24	0.38	0.58	0.66	0.92	1.60
19 Thermal resistance housing-ambient	K / W	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46
20 Thermal resistance rotor-housing	K / W	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
21 Thermal time constant winding	s	6	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Specifications

- Axial play 0.05 - 0.15 mm
- Max. **sleeve bearing** loads
 - axial (dynamic) 0.8 N
 - radial (5 mm from flange) 1.4 N
 - Force for press fits (static) 15 N
- Radial play **sleeve bearing** 0.014 mm
- Ambient temperature range -20 ... +65°C
- Max. rotor temperature +85°C
- Number of commutator segments 7
- Weight of motor 12 g
- 2 pole permanent magnet
- Values listed in the table are nominal. For applicable tolerances see page 43. For additional details please use the maxon selection program on the enclosed CD-Rom.

Operating Range


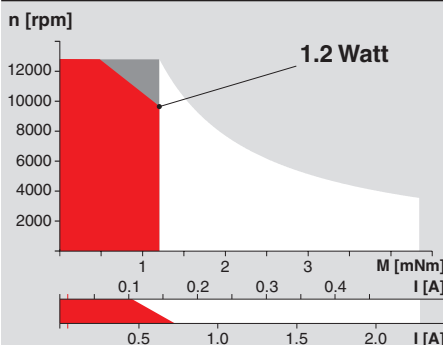


Comments

Details on page 49

- **Recommended operating range**
- **Continuous operation**
In observation of above listed thermal resistances (lines 19 and 20) the maximum permissible rotor temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
- **Short term operation**
The motor may be briefly overloaded (recurring).

RE 13 \varnothing 13 mm, Precious Metal Brushes, 1.2 Watt, $\text{C}\epsilon$ approved

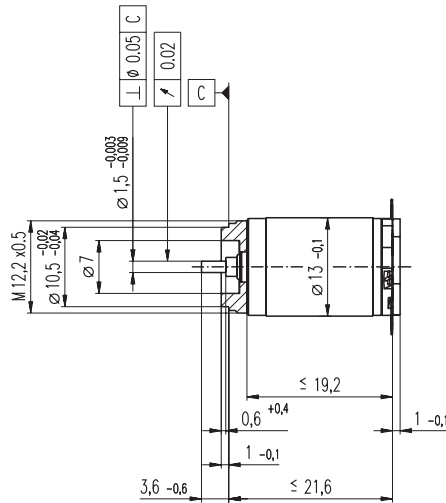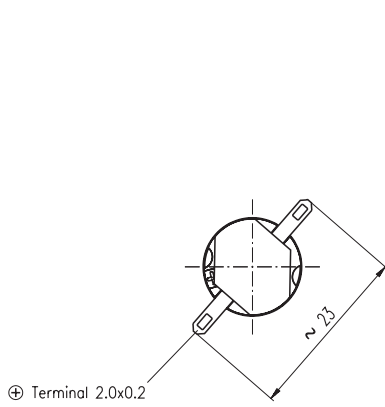

M 1:1

- Stock program
- Standard program
- Special program (on request!)


Order Number

Motor Data		118416	118417	118418	118419	118420	118421	118422	118423	118424	118425	118426	118427	118428	118429	118430
1 Assigned power rating	W	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
2 Nominal voltage	Volt	1.0	1.2	1.5	1.8	2.4	3.0	3.6	4.2	5.0	6.0	8.0	9.0	10.0	12.0	15.0
3 No load speed	rpm	11600	11300	11100	11000	11300	11600	12100	11500	11300	10900	11700	10600	11000	11200	10700
4 Stall torque	mNm	2.86	2.40	2.52	2.45	2.54	2.77	3.08	2.90	2.76	2.69	2.84	2.52	2.57	2.65	2.48
5 Speed / torque gradient	rpm / mNm	4170	4880	4560	4640	4600	4310	4040	4090	4220	4190	4250	4350	4440	4380	4450
6 No load current	mA	104	84	66	54	42	35	31	25	20	16	13	10	10	8	6
7 Starting current	mA	3560	2450	2020	1620	1300	1150	1110	857	674	530	449	321	307	268	190
8 Terminal resistance	Ohm	0.281	0.491	0.742	1.11	1.85	2.61	3.23	4.90	7.42	11.3	17.8	28.0	32.6	44.9	78.8
9 Max. permissible speed	rpm	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700	12700
10 Max. continuous current	mA	720	720	720	720	662	557	501	406	330	267	213	170	158	134	101
11 Max. continuous torque	mNm	0.492	0.615	0.801	0.987	1.22	1.26	1.30	1.29	1.27	1.27	1.26	1.25	1.24	1.24	1.24
12 Max. power output at nominal voltage	mW	849	693	718	688	738	820	959	858	802	756	855	685	727	762	676
13 Max. efficiency	%	69	67	68	67	68	69	70	70	69	69	69	68	68	68	68
14 Torque constant	mNm / A	0.802	0.980	1.25	1.51	1.96	2.41	2.76	3.39	4.10	5.08	6.33	7.84	8.37	9.89	13.0
15 Speed constant	rpm / V	11900	9740	7660	6310	4870	3970	3460	2820	2330	1880	1510	1220	1140	966	734
16 Mechanical time constant	ms	15	14	14	13	13	13	13	13	13	13	13	13	13	13	13
17 Rotor inertia	gcm ²	0.343	0.278	0.286	0.276	0.274	0.287	0.302	0.298	0.289	0.290	0.286	0.280	0.276	0.279	0.275
18 Terminal inductance	mH	0.01	0.01	0.01	0.02	0.04	0.05	0.07	0.11	0.16	0.24	0.38	0.58	0.66	0.92	1.60
19 Thermal resistance housing-ambient	K / W	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46
20 Thermal resistance rotor-housing	K / W	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
21 Thermal time constant winding	s	6	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Specifications

- Axial play 0.05 - 0.15 mm
- Max. **sleeve bearing** loads
 - axial (dynamic) 0.8 N
 - radial (5 mm from flange) 1.4 N
 - Force for press fits (static) 15 N
- Radial play **sleeve bearing** 0.014 mm
- Ambient temperature range -20 ... +65°C
- Max. rotor temperature +85°C
- Number of commutator segments 7
- Weight of motor 15 g
- 2 pole permanent magnet
- Values listed in the table are nominal. For applicable tolerances see page 43. For additional details please use the maxon selection program on the enclosed CD-Rom.

Operating Range

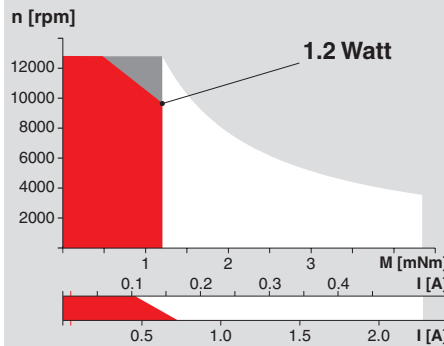

Comments

- **Recommended operating range**
 - Continuous operation**
In observation of above listed thermal resistances (lines 19 and 20) the maximum permissible rotor temperature will be reached during continuous operation at 25°C ambient. = Thermal limit.
 - Short term operation**
The motor may be briefly overloaded (recurring).
- 118430 Motor with high resistance winding
118416 Motor with low resistance winding

Details on page 49

maxon Modular System


Overview on page 17 - 21

Planetary Gearhead

\varnothing 13 mm
0.2 - 0.35 Nm
Details page 194


Planetary Gearhead

\varnothing 13 mm
0.05 - 0.15 Nm
Details page 195



Recommended Electronics:
LSC 30/2
page 251

RE 13 $\varnothing 13$ mm, Graphite Brushes, 1.5 Watt

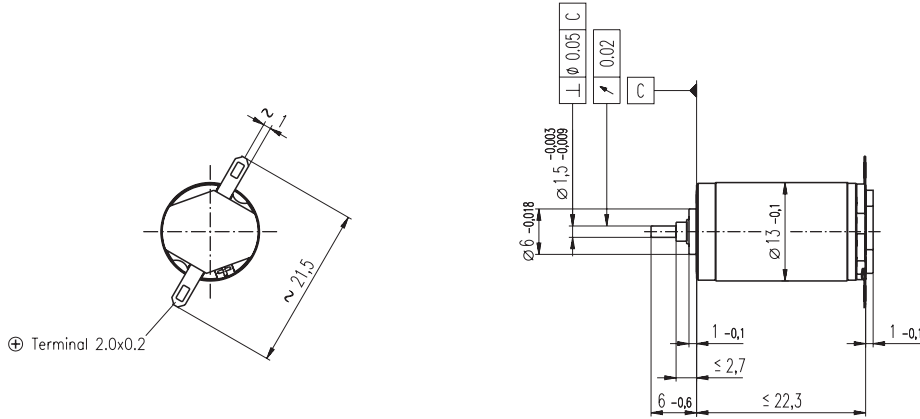

M 1:1

- Stock program
- Standard program
- Special program (on request!)


Order Number

Motor Data		118521	118522	118523	118524	118525	118526	118527	118528	118529	118530	118531	118532	118533	118534	118535
1 Assigned power rating	W	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
2 Nominal voltage	Volt	1.2	1.5	2.4	3.0	3.6	4.2	4.8	6.0	7.2	9.0	12.0	12.0	15.0	18.0	20.0
3 No load speed	rpm	12800	12900	13600	13100	12900	13300	12300	12700	12300	12300	13300	12300	13100	14000	13300
4 Stall torque	mNm	3.03	2.75	3.09	3.04	3.18	3.46	3.20	3.21	3.13	3.11	3.27	3.00	3.22	3.51	3.22
5 Speed / torque gradient	rpm / mNm	4840	5460	5030	4930	4600	4300	4340	4470	4430	4490	4590	4680	4620	4480	4680
6 No load current	mA	473	389	257	196	159	140	110	92	74	59	49	45	39	35	30
7 Starting current	mA	3880	2880	2090	1590	1360	1290	971	804	633	504	428	367	334	320	254
8 Terminal resistance	Ohm	0.309	0.522	1.15	1.88	2.65	3.27	4.94	7.46	11.4	17.9	28.1	32.7	44.9	56.2	78.9
9 Max. permissible speed	rpm	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000
10 Max. continuous current	mA	720	720	720	657	554	499	405	330	267	213	170	157	134	120	101
11 Max. continuous torque	mNm	0.563	0.688	1.06	1.26	1.30	1.34	1.34	1.32	1.32	1.31	1.30	1.29	1.29	1.31	1.29
12 Max. power output at nominal voltage	mW	930	848	1020	968	1000	1120	960	993	936	929	1060	896	1030	1200	1040
13 Max. efficiency	%	44	42	44	44	46	47	46	46	46	45	46	45	46	47	46
14 Torque constant	mNm / A	0.782	0.955	1.48	1.91	2.34	2.69	3.30	3.99	4.95	6.17	7.64	8.16	9.64	10.9	12.7
15 Speed constant	rpm / V	12200	10000	6470	5000	4070	3550	2890	2390	1930	1550	1250	1170	991	873	753
16 Mechanical time constant	ms	17	16	15	14	14	14	14	14	13	13	13	14	13	13	13
17 Rotor inertia	gcm ²	0.343	0.278	0.276	0.274	0.287	0.302	0.298	0.289	0.290	0.286	0.280	0.276	0.279	0.286	0.275
18 Terminal inductance	mH	0.01	0.01	0.02	0.04	0.05	0.07	0.11	0.16	0.24	0.38	0.58	0.66	0.92	1.19	1.60
19 Thermal resistance housing-ambient	K / W	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46
20 Thermal resistance rotor-housing	K / W	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
21 Thermal time constant winding	s	6	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Specifications

- Axial play 0.05 - 0.15 mm
- Max. **sleeve bearing** loads
 - axial (dynamic) 0.8 N
 - radial (5 mm from flange) 1.4 N
 - Force for press fits (static) 15 N
- Radial play **sleeve bearing** 0.014 mm
- Ambient temperature range -20 ... +65°C
- Max. rotor temperature +85°C
- Number of commutator segments 7
- Weight of motor 14 g
- 2 pole permanent magnet
- Values listed in the table are nominal. For applicable tolerances see page 43. For additional details please use the maxon selection program on the enclosed CD-Rom.

Operating Range

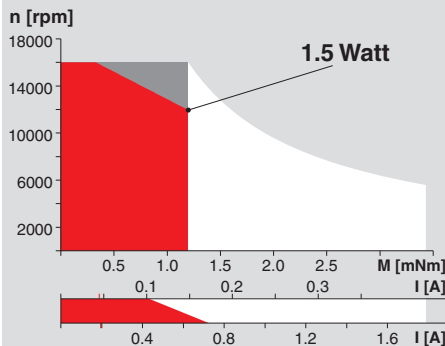

Comments

- Recommended operating range**
 - Continuous operation**
In observation of above listed thermal resistances (lines 19 and 20) the maximum permissible rotor temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
 - Short term operation**
The motor may be briefly overloaded (recurring).
- 118535 Motor with high resistance winding
118521 Motor with low resistance winding